




OMNI DIRECTIONAL PRO SERIES IP SPEAKER

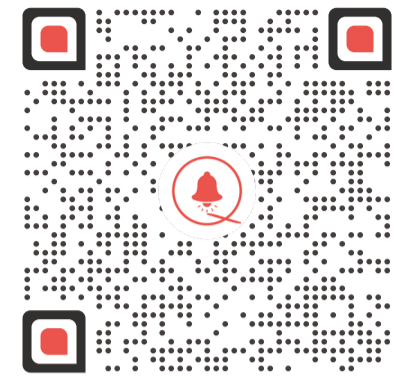

WWW.QUICKLERT.COM

Installation and Setup

Step 1

Install the bracket securely onto the ceiling, employing the designated template located on the reverse side of this sheet. Depending on the installation location of the IP Speaker, select either the 100x100 or 200x200 VESA mounting standard.

Step 2

Thread the PoE (60W) cable through the designated aperture of the mounting bracket, ensuring a secure and stable connection, and insert it into the appropriate ethernet port. Alternatively, the device may be powered using a 12V-5A rated power supply (sold separately). Securely affix the device to the mounting plate using the included screws.

Step 3

Open the Quicklert Device Manager App on your iOS or Android device and scan the QR code on the front of the IP Speaker. Follow the on-screen instructions for streamlined configuration. Alternatively, you can use the browser-based Quicklert Management Platform. Scan the QR code above to gain further insights.

POWERED BY
ALL-IN-ONE SECURITY & COMMUNICATIONS PLATFORM
FOR SAFER, SMARTER FACILITIES

IP SPEAKERS

TABLETS

DIGITAL SIGNAGE

INTERACTIVE DISPLAYS


PANIC BUTTONS

CAMERAS

SENSORS

ACCESS CONTROL

APPLICATIONS

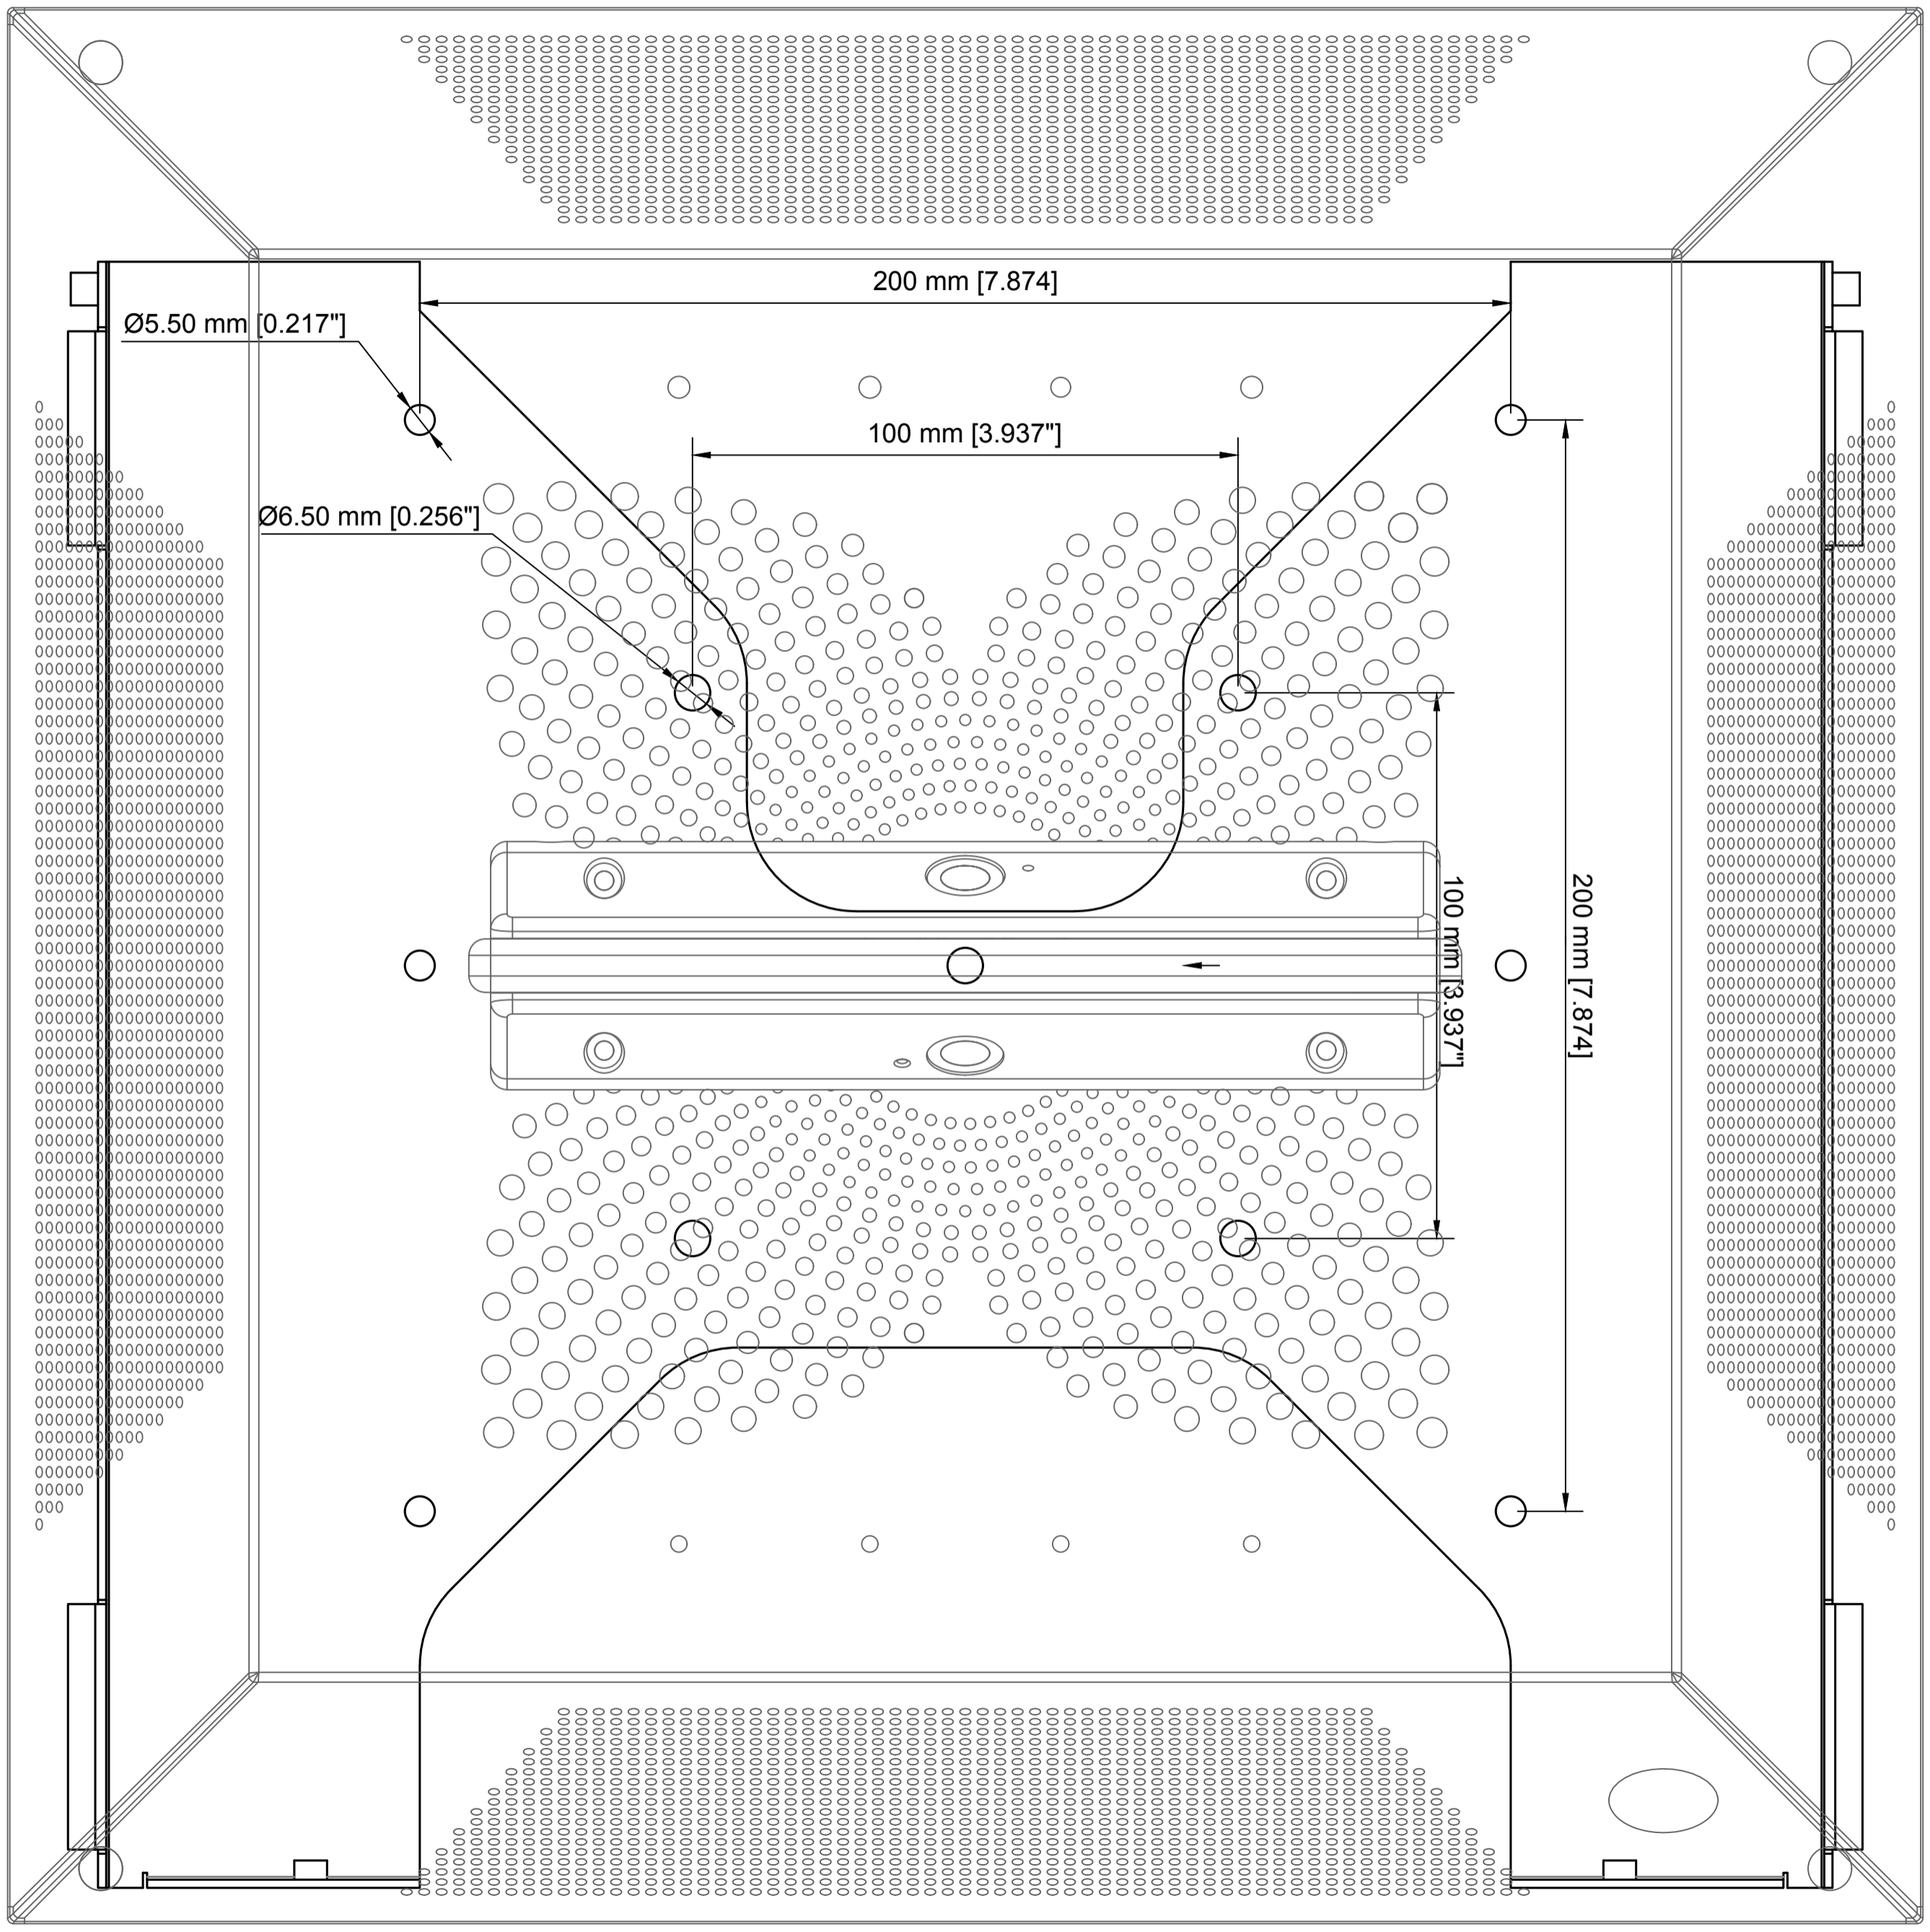

200 mm [7.874"]

100 mm [3.937"]

Ø5.50 mm [0.217"]

Ø6.50 mm [0.256"]

100 mm [3.937"]

200 mm [7.874"]